

EN 12390-4 and EN 772-1 SEMI-AUTOMATIC COMPRESSION TESTING MACHINES FOR MASONARY UNITS, CUBES AND CYLINDERS

Product Code

UTC-5729.SLP 2000 kN EN 12390-4 and EN 772-1 Semi-Automatic Compression Testing Machines for Masonary Units, Cubes and Cylinders

UTC-5739.SLP 3000 kN EN 12390-4 and EN 772-1 Semi-Automatic Compression Testing Machines for Masonary Units, Cubes and Cylinders

UTC-0210 High Precision Pressure Transducer and Electronic

UTC-4682 Pedestal for 2000kN and 3000 kN Compression Testing Frames with Welded Walls

Models for 220-240V 50-60 Hz, 1 ph.

UTC-5729.SLP	UTC-5739.SLP
--------------	--------------

Models for 110-120V 60 Hz, 1 ph.

UTC-5729.SLP-N	UTC-5739.SLP-N
----------------	----------------

Product Code

EN 12390-4, EN 12390-3

UTC-5729.SLP and UTC-5739.SLP models Semi-Automatic Compression Testing Machines are manufactured for compression testing of masonry units, cubes and cylinders acc. to EN standards. These machines also meet the requirements of CE norms with respect to the health and safety of the operator. And their user-friendly design enable an inexperienced operator to perform the test. The machines are supplied with factory calibration certificate for force transfer stability and the self- alignment of the upper loading platen conforming to EN 12390-4. The Semi-Automatic Compression Machines consist of a welded frame (see table), hydraulic power pack (UTC-4820) with LPI battery operated digital readout unit (UTC-4920LP). UTC-4682 Pedestal for the frames of the machines should be ordered separately.

Main Features

- Class A starting from with the 5% of the machine capacity, (Special calibration option starting from 1% of the full range with UTC-0210)
- 1 channel with two different calibration table, test parameters and specimen information (by changing the sensor belong to other frame, the unit can be control for second test frame)
- Multi-point calibration
- Real time numeric display of load and load pressure
- Peak hold property
- Supplied with factory calibration certificate for force transfer stability and the self-alignment of the upper loading platen conforming to EN 12390-4
- Welded steel walled frame with lower and upper (shperically-seated) loading platens
- Load measurment with a pressure transducer
- Hydronic pump with dual stage for rapid approach
- RS232 Serial port for PC or thermal or dot matrix printer
- Free of charge Utest software for compression/flexure testing machines(USOFT-4820.SLP) for compression, flexure, splitting tensile strength tests of construction materials such as concrete, cement, brick/masonry units



UTC - 5729.SLP

Safety Features

- Maximum pressure valves to avoid machine overloading
- Limit switch for piston stroke
- Removable transparent front and rear safety doors

USOFT-4820.SLP Test Software is improved for semi-automatic concrete compression and flexural testing machines with LPI Battery Operated Digital Readout Unit during the test to collect and record data and to prepare the report containing the results obtained. Before the test, a PC which the Utest software is installed is connected to RS232 port of LPI reading unit, the data obtained in the test can be monitored and recorded in real time. The advanced functions for data base management provide an easy navigation of all saved data. Test report including the test results and user defined test information (names and the Company details, test type, specimen type, user info and other knowledge required) can be print out.

EN 12390-4 and EN 772-1 SEMI-AUTOMATIC COMPRESSION TESTING MACHINES FOR MASONARY UNITS, CUBES AND CYLINDERS


Models	UTC-5729.SLP	UTC-5739.SLP
Capacity	2000 kN	3000 kN
Frame Type	Welded Steel	Welded Steel
Bearing Platens Dimensions (D)	310x510x50mm	310x510x50mm
Upper Bearing Block, (With Spherically Seating Assembly) Dimensions (C)	310x510x50mm	310x510x50mm
Surface Hardness of Bearing Blocks	55 HRC	55 HRC
Flatness Tolerance	0,03 mm	0,03 mm
Piston Diameter	250 mm	300 mm
Piston Stroke	50 mm	50 mm
Maximum Vertical Clearance Between Bearing Blocks (E)	350 mm	350 mm
Horizontal Clearance (B)	360 mm	415 mm
For Cubes (up to) Specimens Sizes	Ø160x320 mm	Ø160x320 mm
For Cylinder (up to) Specimens Sizes	300 mm (**)	300 mm (**)
For Masonary Units (up to) Specimens Si	300x500 mm (**)	300x500 mm (**)
Power	550 W	550 W
Oil Capacity	20 L	20 L
Maximum Working Pressureor	410 Bar	410 Bar
Dimensions (wxlxh) (Axd*xF)	750x550x1145 mm	805x550x1205 mm
Weight	950 kg	1190 kg
Pedestal (Optional)	UTC-4682	UTC-4682

(d*) Depth (**) Limited by capacity of the frame

The machines for cubes and cylinders are supplied complete with;

- 100 mm, 50 mm, 30 mm height x Ø205 mm distance pieces
- Fixture for Centering Specimens, compatible with 310x510x50 mm lower loading platen for 100 mm and 150 mm cubes, Ø100 mm and Ø150 mm cylinders
- Lifting Device for Lower Loading Platen (UTC-4629)
- Removable transparent front and rear safety doors

Appropriate Distance piece/s for the cylinder and cube specimens with the height of lower than 150 mm should be ordered separately.

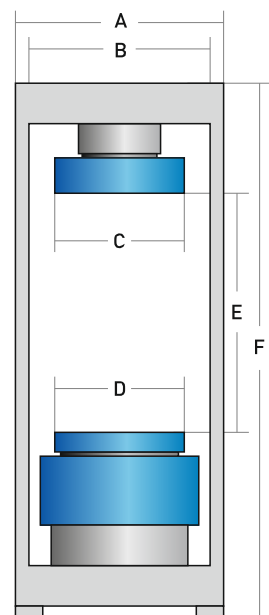

UTC-5739.SLP